



Electric Pallet Truck

EPT20/25/30-RS
LPT20/25/30-RS



Electric Pallet Truck 2.0/2.5/3.0t

Electric Pallet Truck 2.0/2.5/3.0T

EPT20/25/30-RS LPT20/25/30-RS


Distinguishing Mark						
1.1	Manufacturer			ALVOX		
1.2	Model			EPT20RS		EPT25RS EPT30RS
1.4	Power Unit			Electric		Electric Electric
1.5	Operating Type			Standing		Standing Standing
1.6	Load Capacity	q	kg	2000		2500 3000
1.7	Load Center	c	mm	600		600 600
1.8	Load Distance	x	mm	957		957 957
1.9	Wheelbase	y	mm	1435		1440 1450
Tyres,Chassis						
3.1	Wheel Material			PU/PU		PU/PU PU/PU
3.2	Tyre size, Loading wheels		mm	Ø80×80		Ø80×80 Ø80×80
3.3	Tyre size, Driving wheels		mm	Ø230×75		Ø230×75 Ø230×75
3.4	Tyre size, Caster wheels		mm	Ø124×50		Ø124×50 Ø124×50
3.5	Number of wheels driving, caster/ loading (x=driving)		psc	1x, 2/4		1x, 2/4 1x, 2/4
3.6	Track width, front, driving side	b10	mm	540		540 540
3.8	Track width, rear, loading side	b11	mm	500		500 500
Dimensions						
4.4	Lift height	h3	mm	200		200 200
4.9	Height of tiller arm in driving position, min./max.	h14	mm	1050/1275		1050/1275 1050/1275
4.15	Lowered height	h13	mm	85		85 85
4.19	Overall length	l1	mm	2381		2386 2396
4.20	Length to fork face	l2	mm	684		689 699
4.21	Overall width	b1	mm	800		800 800
4.22	Fork dimensions	s/e/l	mm	50x185x1150		50x185x1150 50x185x1150
4.25	Distance between fork-arms	b5	mm	685		685 685
4.32	Ground clearance	m2	mm	40		40 40
4.33	Aisle width for pallets 1000×1200 crossways	Ast	mm	2420		2425 2430
4.34	Aisle width for pallets 800×1200 lengthways	Ast	mm	2505		2510 2515
4.35	Turning radius	Wa	mm	1725		1730 1740
Performance						
5.1	Travel speed, laden/unladen		km/h	5.8/5.9		5.8/5.9 5.8/5.9
5.2	Lifting speed, laden/unladen		mm/s	35/45		35/45 35/45
5.3	Lowering speed, laden/unladen		mm/s	50/40		50/40 50/40
5.8	Max. gradeability, laden/unladen		%	8/8		8/8 8/8
5.10	Service brake			Electromagnetic		Electromagnetic Electromagnetic
Electric-engine						
6.1	Driving motor rating S2 60 min		kW	1.5		2.2 2.2
6.2	Lifting motor rating S3 7.5%		kW	2.2		2.2 2.2
6.4	Battery voltage/nominal capacity K20		V/Ah	24V/210Ah		24V/210Ah 24V/210Ah
6.5	Battery weight		kg	196		196 196
Others						
8.1	Type of driving control			AC		AC AC
10.5	Steering type			Electronic		Electronic Electronic
10.7	Noise at the driver's ears		dB(A)	<74		<74 <74
Li-ion Battery 						
11.1	Model			LPT20-RS		LPT25-RS LPT30-RS
6.4	Battery voltage/nominal capacity K20		V/Ah	24V/200Ah		24V/200Ah 24V/200Ah
6.5	Battery weight		kg	80		80 80

1.The parameters in the table are of the standard model. For more information, please contact us.

2.The parameters are subject to change without notice.

EPT20/25/30-RS LPT20/25/30-RS

Product Show

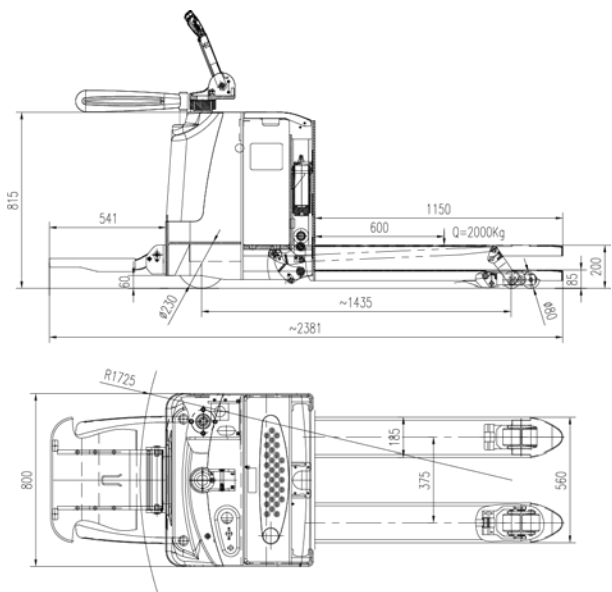

EPT20/25/30-RS LPT20/25/30-RS

